


# BIHLER – REELS

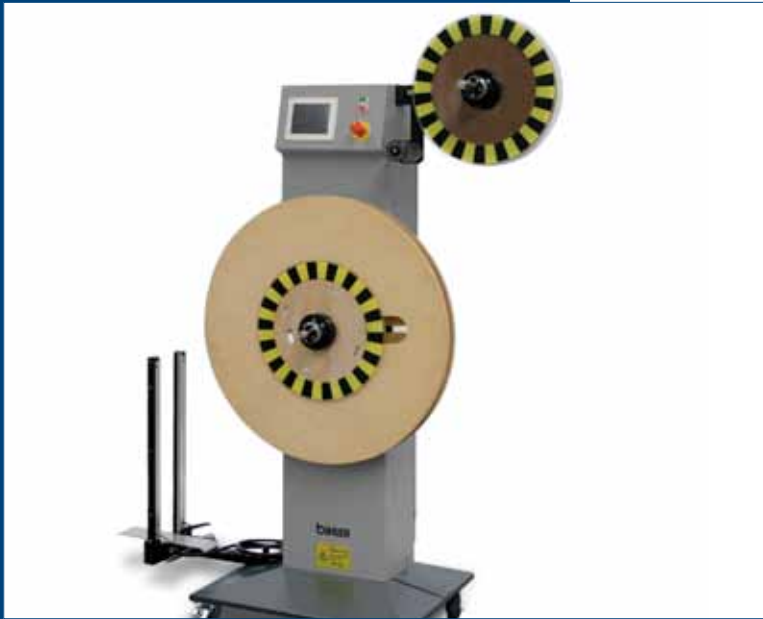

## BASIC REEL EW 1000

incl. loop control with photocell sensor

Specifications:

- coil axis diameter 20 mm
- max. coil diameter 1,000 mm
- max. load 100 kg
- max. strip width 100 mm
- strip thickness from 0.1 mm to 2.0 mm



## VERTICAL REEL VH 1300

with servomotor-driven strip decoiling

Specifications:

- max. coil diameter 1,300 mm
- max. strip width 120 mm (320 mm)
- spreading range from 370 mm to 420 mm
- max. coil weight 1,000 kg



## PALLET REEL PH 1500E

with motor-driven strip decoiling  
compensating roller manually adjustable

Specifications:

- max. coil diameter 1,500 mm
- max. load 2,000 kg
- max. strip width 100 mm
- strip thickness from 0.2 mm to 2.0 mm